



H

H-OS05

_V1.1

注意事项

1. 请远离强磁场、高温、潮湿、

1

1.1

1

1.2

1

2

2.1

2

2.2 ~~WWWWWWWW~~. . δ . δ 3 .

4

3.1

4

3.2

5

3.3 "□ □ □ □ □ "□□ □ □

H

IC

1.1

●

IC

●

●

●

●

/

●

1.2

1

DC 24V

$\leq 60\text{mA}$

$\leq 130\text{mA}$

-20 ~55

-40 ~70

(W/H/D) 120 × 194 × 44.7mm

2

CMOS

30W


95 °

0 lux

2.2mm

12 °

2.1


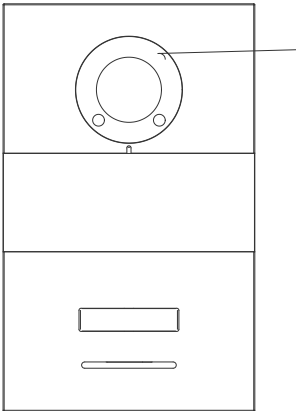


2.2




RJ45					24V	PoE
NO	COM	NC	/			
GS	GS-GND					
GND	DC+					

3.1


	W/H/D :100.6 × 175.5 × 39mm
	
	

3.2

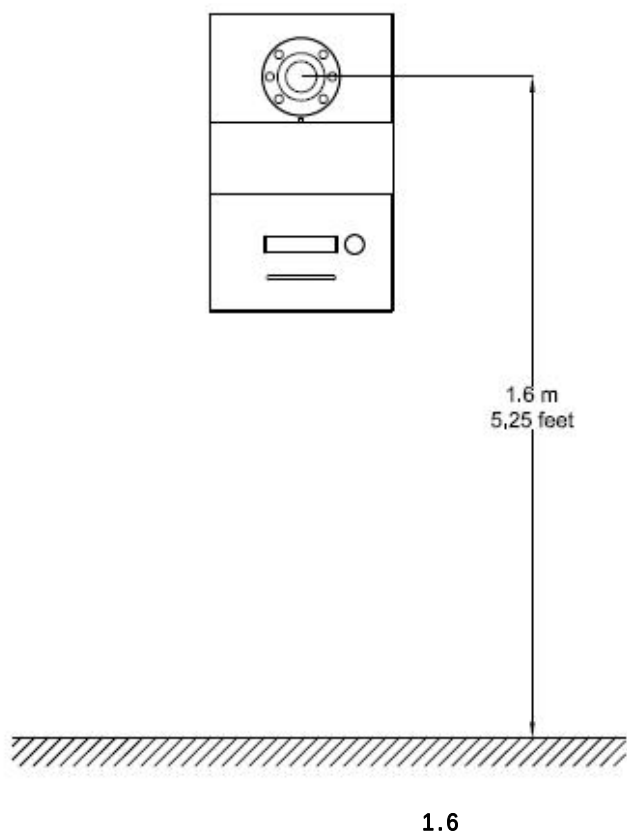

3.3


-

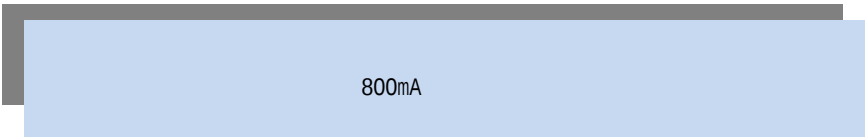

●



常开型
出门按钮



●



4.1

30

4.2

1)

2)

3)

4.3

5S

GVS

1

30

4.4

10000

IC

PC


PC

2

 PC

4.5

120

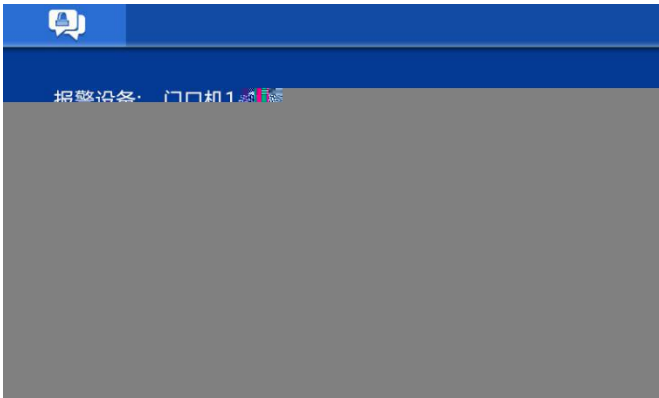

4.6

