

T

2.8

_V1.0

T-OS07

注意事项

2023/11/17 10:08:07

1.1

1.2

.....	1
.....	1
.....	1
.....	2

7.4		20
7.5		20

IC

1.1

●

●

●

●

IC

●

●

●

&

1.2

DC 24~32V

≤ 80mA DC 30V

-25 ~55

≤ 160mA DC 30V

-40 ~70

(W/H/D) 324 × 128 × 46mm

CMOS

700TVL


48 °

0.1 lux

2.2



2.3

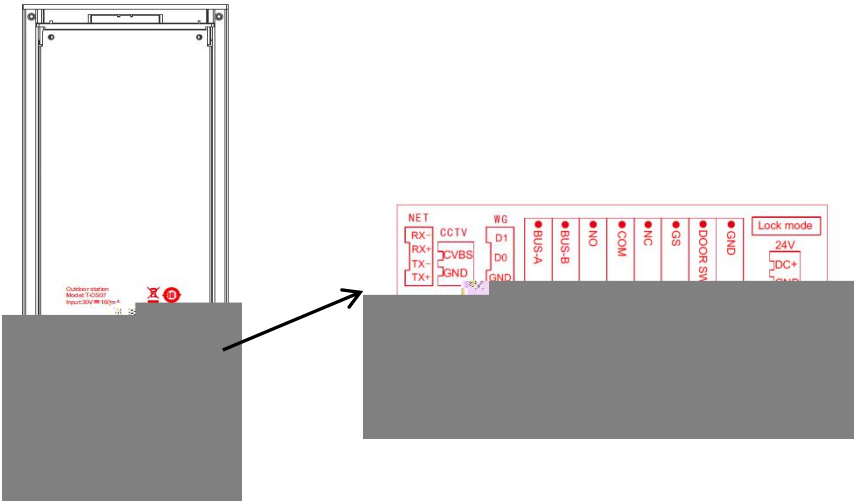

1 2 TX+ TX- 3 6 RX+ RX-

BUS-A BUS-B

NO COM NC / /


GS

DOOR SW

GND

24V



3.1

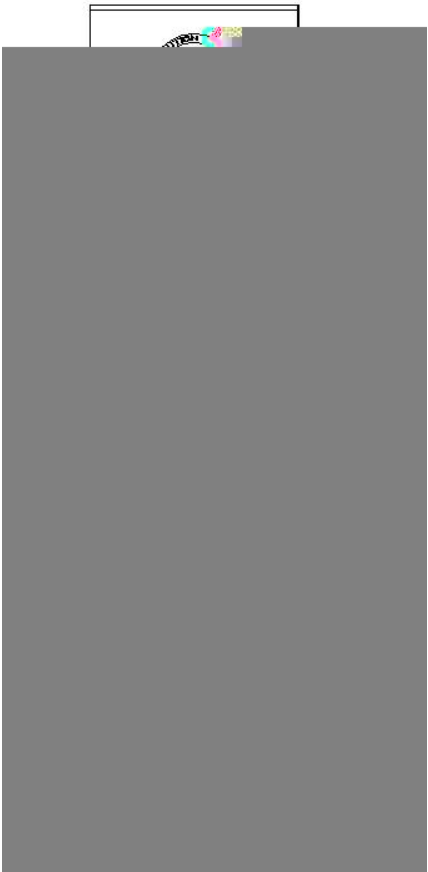


1.6

3.2

2

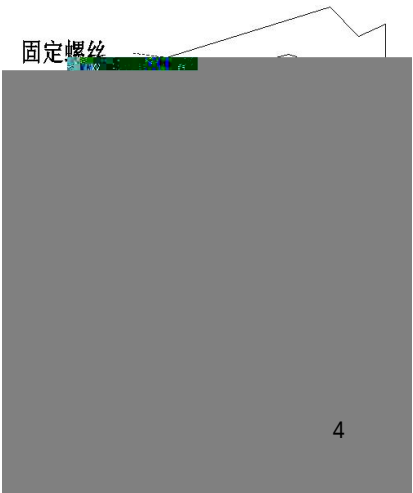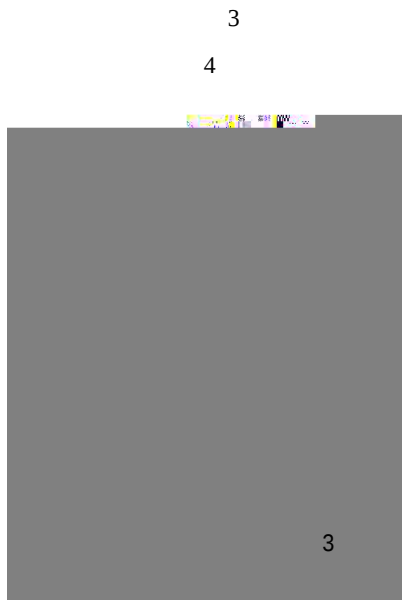

3.3

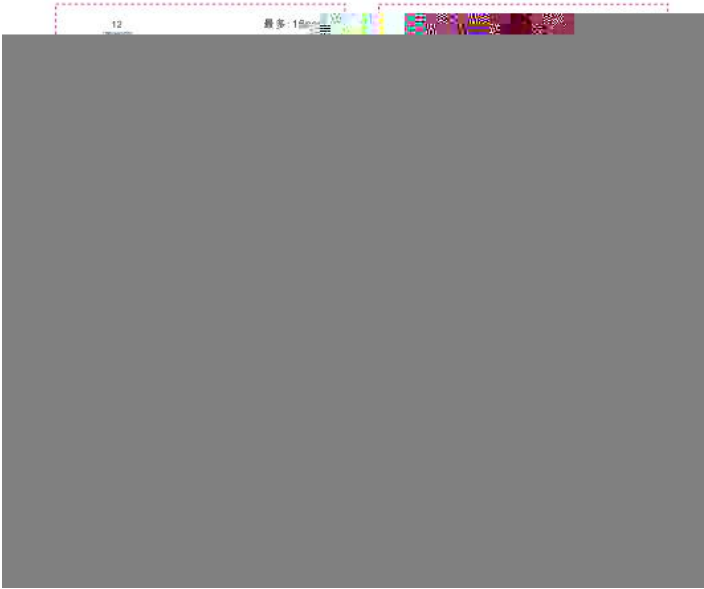

- ①1~128
- ②4
- ③
- ④
- ⑤
- ⑥A B 1

	A+B /m
RVV 2*0.75mm ²	110
	160

3.4






GS

4.1

“ # ”


“ ”

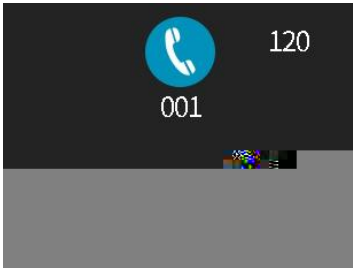

4.2

“ ↑ ↓ ”

PC

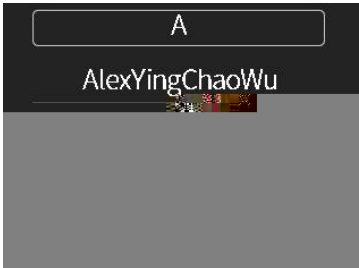

“ ↑ ↓ ”

“ # ”

4.3



4.4

1)

2)

3)

4)

“ # ” 1S

#

1

2 666666

5)

“ *# ”

Private Password

Please input Apt No.

001

#OK

“ # ”

PC

PC

5.1

“ # ” “ * ”

“ 801801 ”

SYSTEM SETTING

Input Password To Log In




Administrator

#OK

5.2

“ # ”

“ ↑ ↓ ”

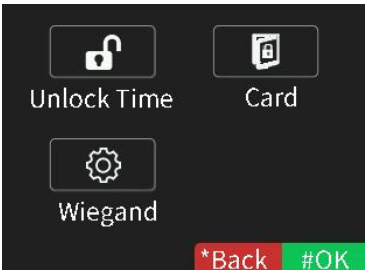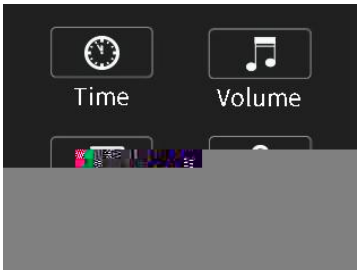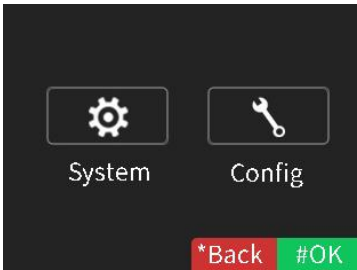

2

6.1

“ ↑ ↓ ”

“ * ”

“ # ”



6.2

“ # ”

“ * ”



6.3

“ ↑ ↓ ”

“ # ”



6.4


“ ↑ ↓ ”

“ # ”


“ * ”



6.5

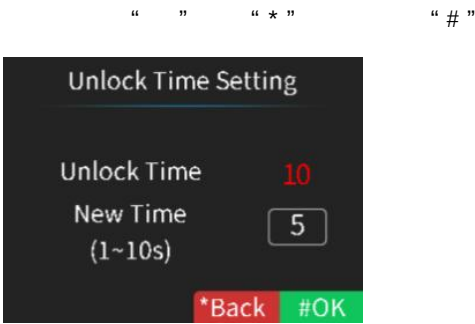

6.6

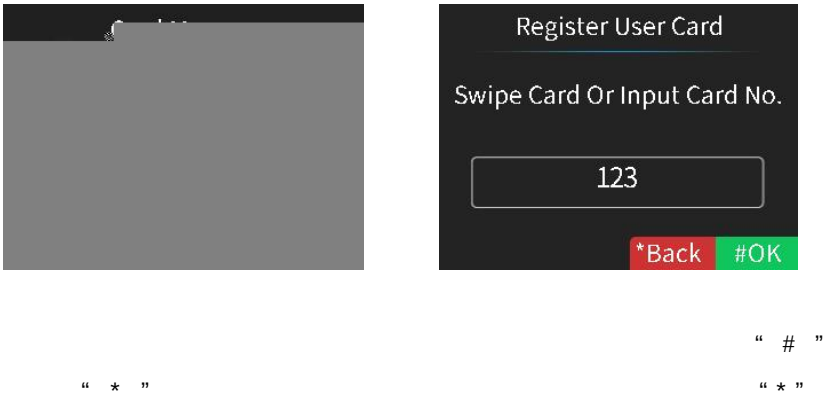


2000

“ ↑ ↓ ”

ID	Card ID
0001	7984561230

“ # ”


“ * ”

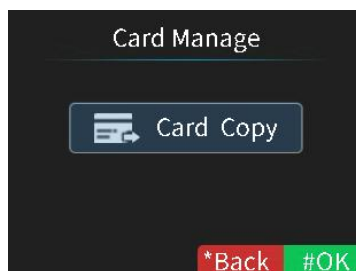


PC

PC

“ ↑ ↓ ”

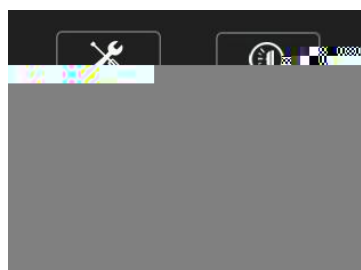

1

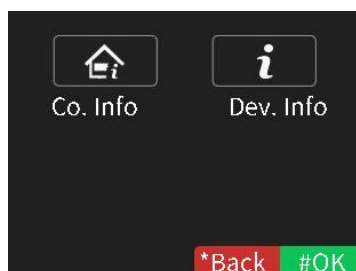

2

7.1

1~32

“ # ”




7.2

“ # ”

120S




7.3

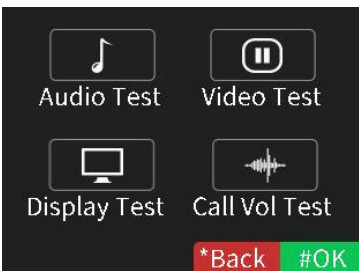

1

2

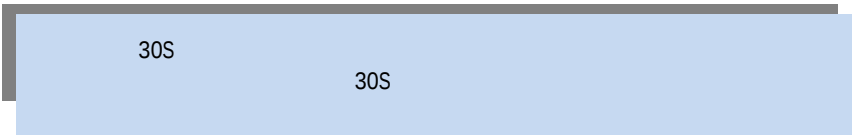



7.4

