

注意事项

1. 请远离强磁场、高温、潮湿等环境。



..... 1

..... 3

..... 7

..... 12


..... 15

1.1.


- • • • •

1.2.


2.1.

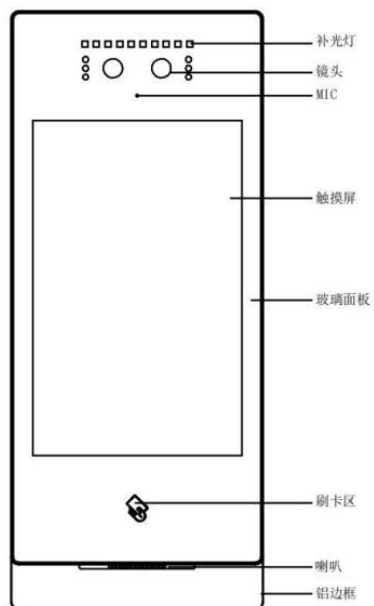


2.2.

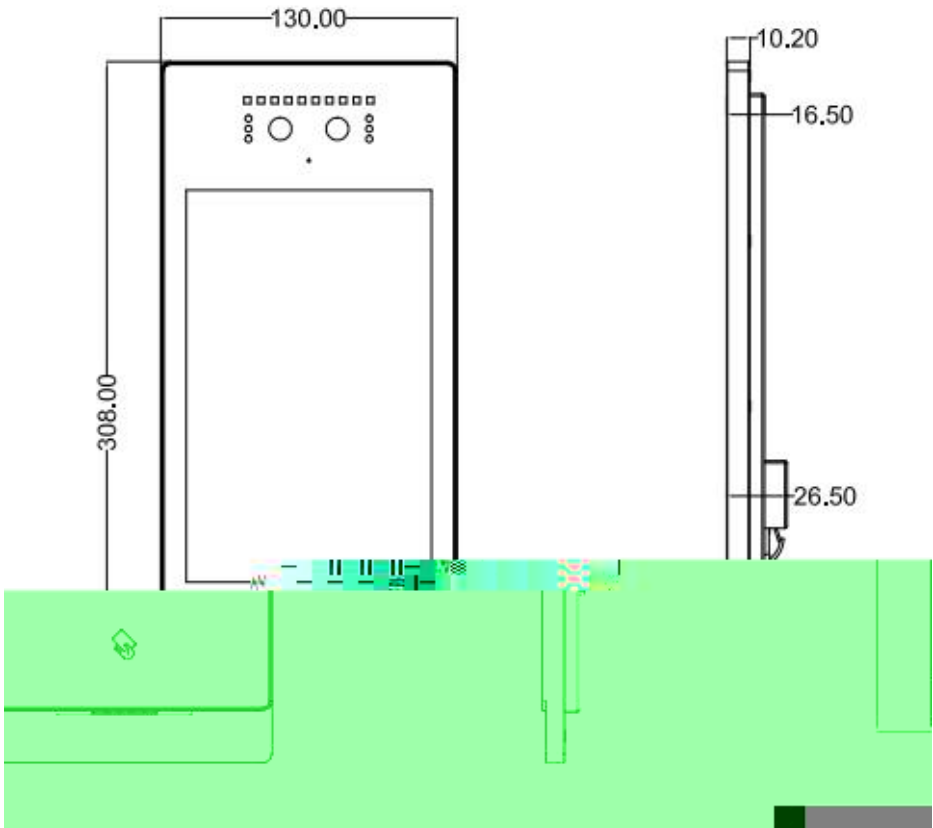

2.3.

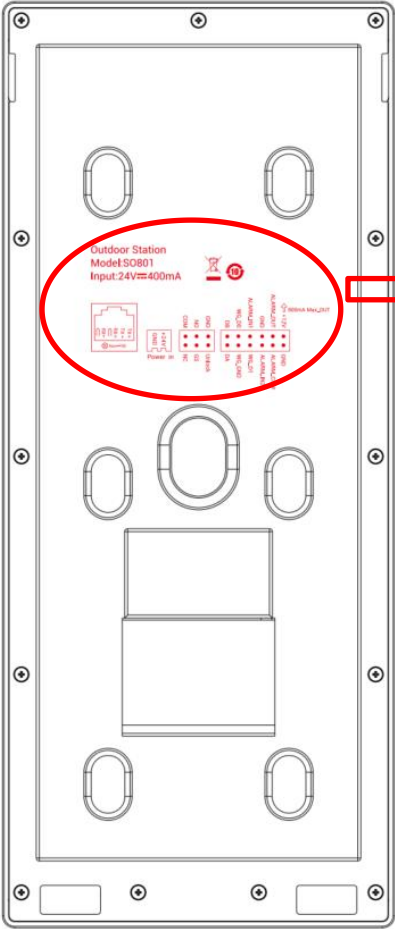



Outdoor Station
Model:S0801
Input:24V~400mA

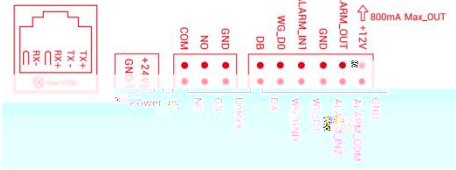


--	--


3.1.

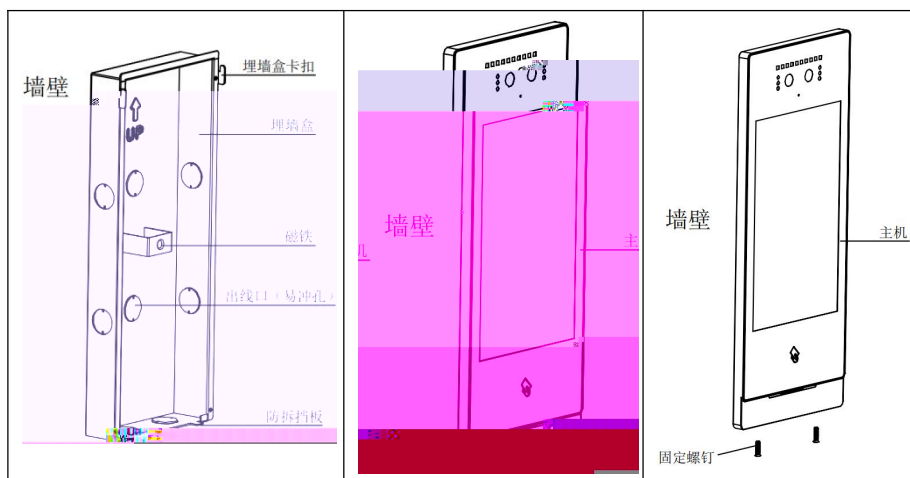

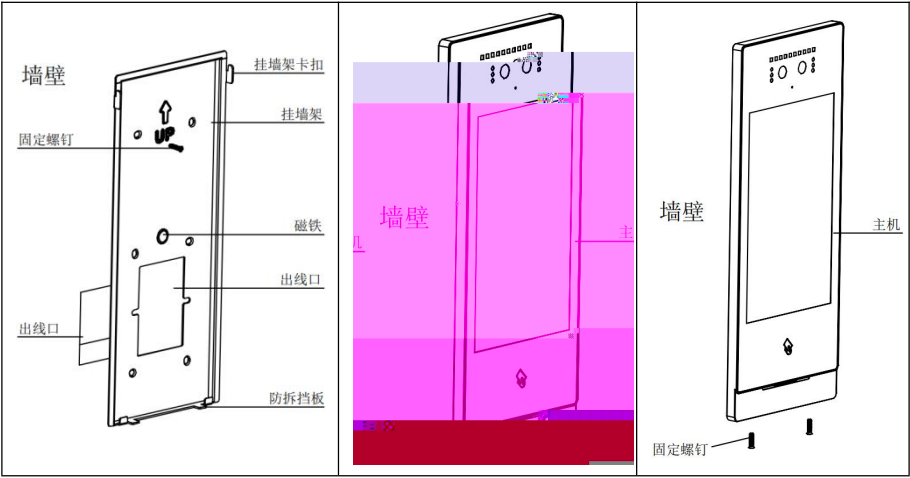

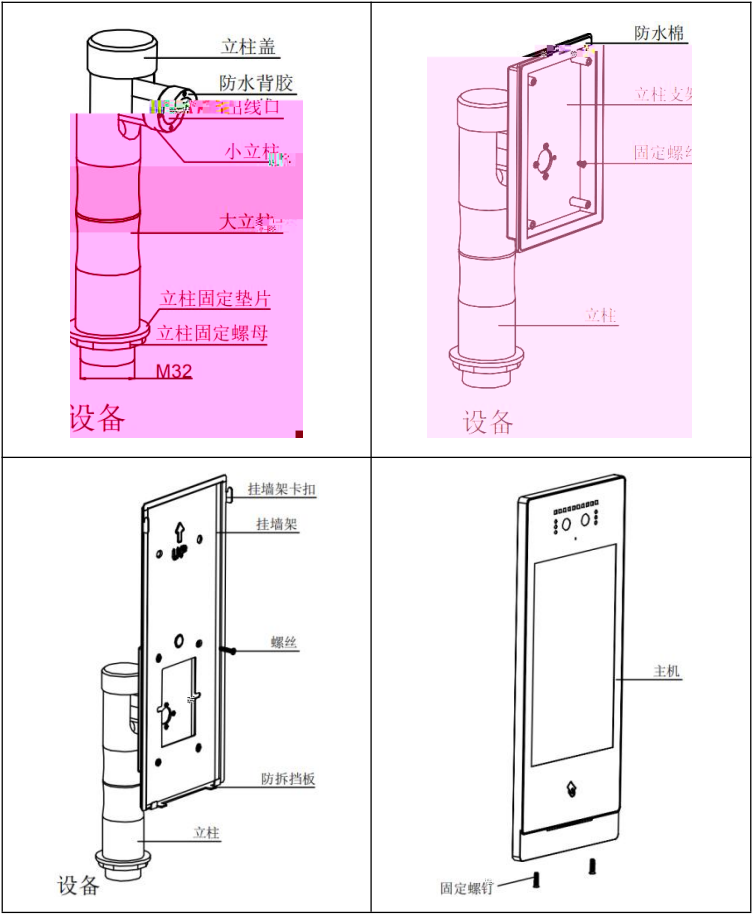



3.2.

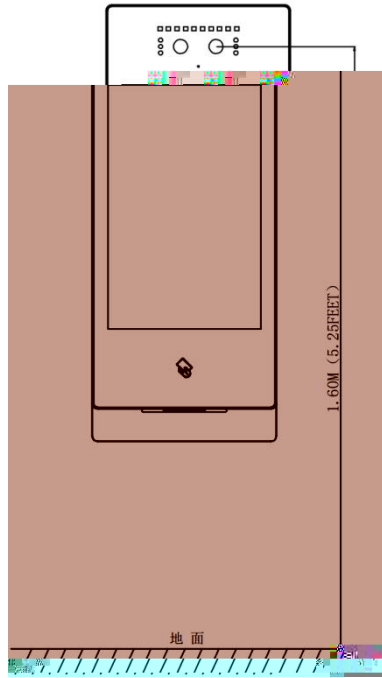


3.3.

1

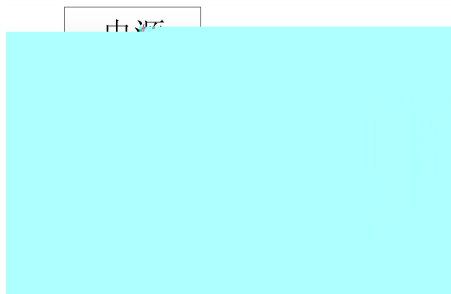


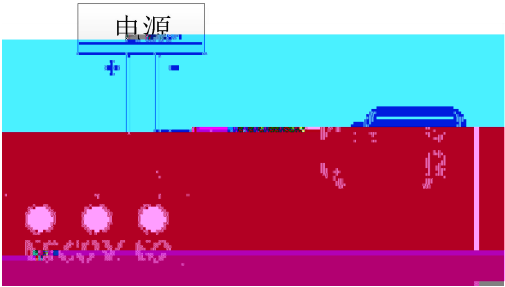

2

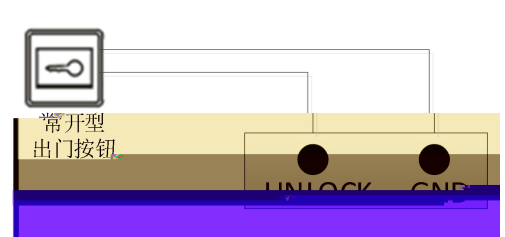


3

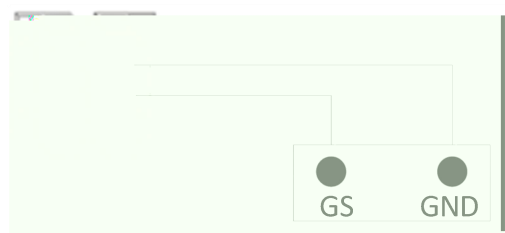

-
-

4.1.

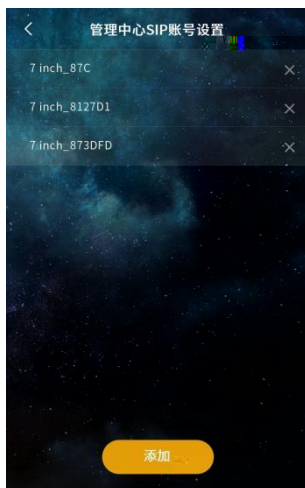


4.2.

&




4.3. /

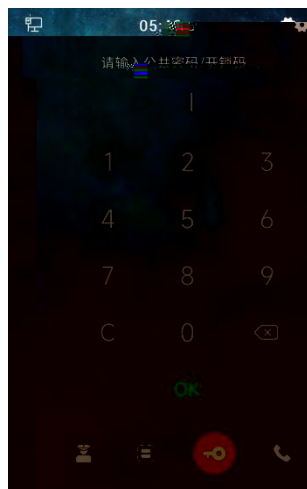


4.4. &



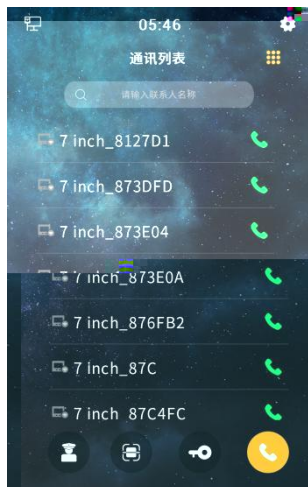




5.3.

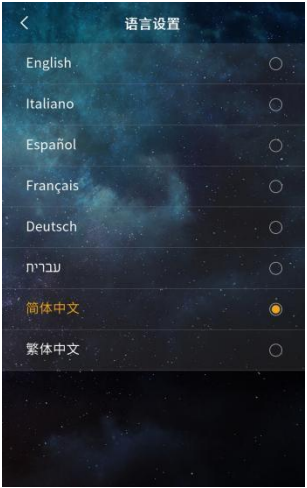

5.4.




5.4.1.

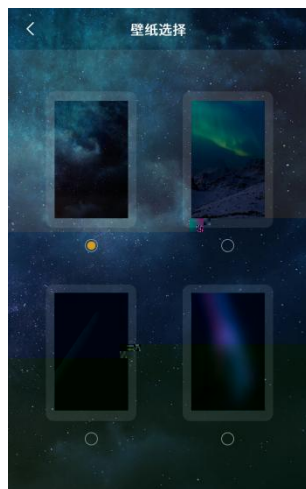

5.5.

5.5.1.



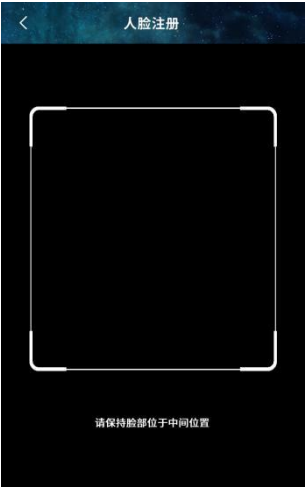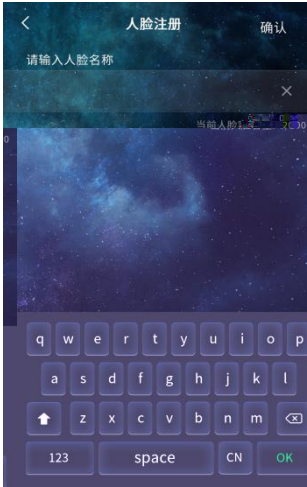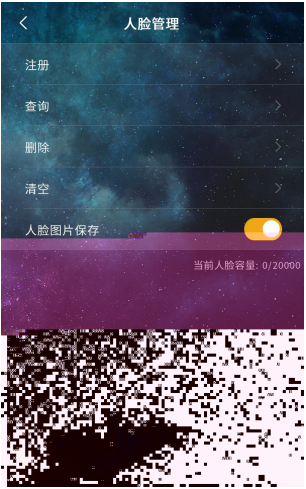

5.5.3.





5.6.



<

SIP账号设置

默认用户名

456349414655660032

×

本机SIP账号

ip:456349414655660032@19

SIP账号1

>

SIP账号2

>

云端SIP账号

1

2

3

4

5

6

7

8

9

✕

0

OK

<

SIP账号1

启用

☐

备注

9030-2129098876

用户名

9030-2129098876

服务器密码

A5tv2Drc3n

服务器地址

sip9.netsantral.com

服务器端口

5060


传输方式

UDP >

保存



-
-
-
-
-

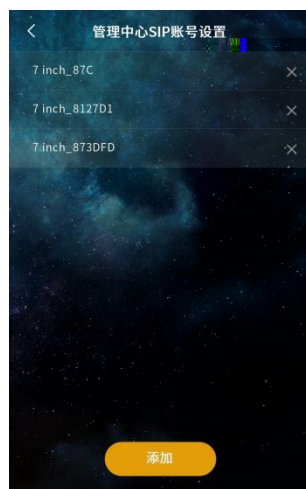

●

5.7.




5.8.



5.9.




5.9.1.

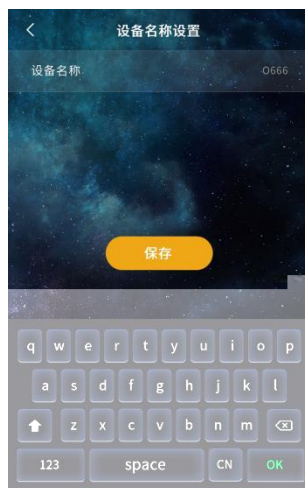

5.9.2.

-
-
-
-

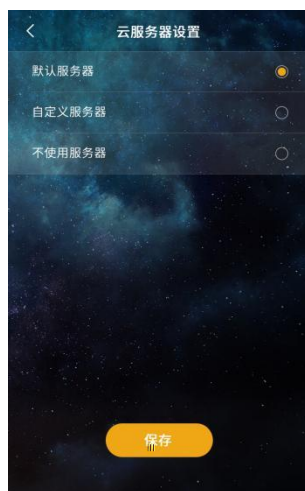

5.9.3.

<

工程密码设置

请输入旧密码

×

请输入新密码

×

||

请再次输入新密码

×

1

2

3

4

5

6

7

8

9

<

0

OK

5.9.4.




5.9.5.



5.9.6.



5.9.7. 12V

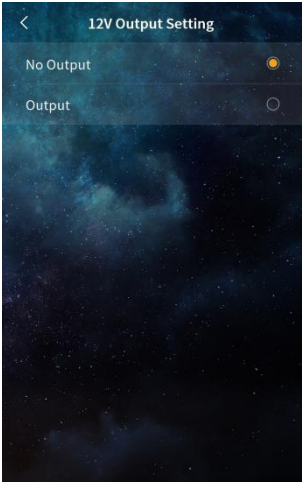


5.9.8.



5.9.9.



5.9.10.

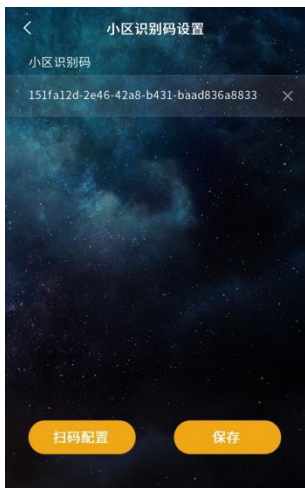

5.9.11. RTSP



5.9.12.



5.10.

5.10.1.



5.10.2.

5.10.3.